

AQUATUFF FILTERS - TORRENT PUMPS



Quality pumps & filters
for your pool or spa



AQUATUFF FILTERS - TORRENT PUMPS

Proper filtration of your swimming pool water is critical in maintaining a healthy swimming environment. Torrent series swimming pool pumps and AquaTuff media and cartridge filters have been designed to work in unison with one another creating optimal water flow through the desired filter media for premium water quality in your swimming pool. All products are manufactured utilising the highest quality components and latest manufacturing techniques to ensure reliability and superior filtration of your swimming pool water. Built for harsh Australian conditions Torrent pumps are supplied standard with marine grade 316 stainless steel shafts, high temperature bearings and long life capacitors. AquaTuff FC series media filters are extra heavy duty with fibreglass bowl and windings, premium quality clamp bands and high efficiency multiport valve. Umbrella-fold, self-cleaning laterals are supplied standard for balanced flow, back washing and easy maintenance. The dual fibreglass skin increases strength and durability ensuring no water gets trapped between layers providing many years of trouble free service. AquaTuff P Series cartridge filters offer premium filtration for tight spaces. Compact, heavy duty tank and lock ring with 50/40mm fittings included.


Ensure you speak with your qualified pool professional and request premium quality filtration equipment for your swimming pool or spa from a brand built on trust and reputation.

Warranty - Media Filter - 10 years on tank, 1 year on multiport valve and fittings

Cartridge Filter - 5 Years on tank, lock nut & lid, 1 year on fittings. **Pump** - 3 years on pump body, 2 years on motor & mechanical seal

AQUATUFF MEDIA & CARTRIDGE FILTERS - SPECIFICATIONS


Model	Connection mm	Flow Lpm	Surface Area m²	Water Temp Max °C	Media Weight kg	Kpa	H (mm)	G (mm)	C (mm)	E (mm)	D (mm)
FC-20	40	160	0.196	50	75	250	830	390	715	655	500
FC-24	40	225	0.283	50	125	250	930	445	800	770	600
FC-28	50	300	0.396	50	175	250	1130	510	995	925	710
FC-32	50	415	0.503	50	300	250	1170	585	1030	980	810
FC-36	50	500	0.636	50	375	250	1270	700	1150	1070	900
P-75	40/50	300	7.0	50	N/A	280	690	285	N/A	495	185
P-100	40/50	370	9.3	50	N/A	280	690	285	N/A	495	185
P-150	40/50	410	13.9	50	N/A	280	940	285	N/A	745	185
P-200	40/50	600	18.6	50	N/A	280	940	285	N/A	745	185

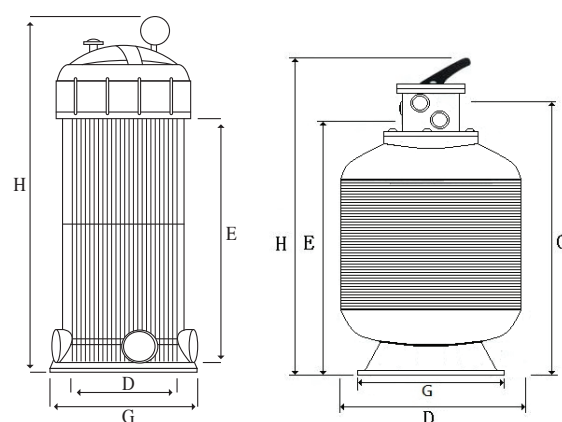


TORRENT PUMPS - SPECIFICATIONS

Model	Qmax (l/min)	Hmax (m)	Power (P²)		L
			kW	HP	
Torrent 75	290	10	0.55	0.75	593
Torrent 100	380	13	0.75	1.0	
Torrent 150	420	17	1.1	1.5	
Torrent 200	465	19.5	1.5	2.0	
Torrent 250	480	21	1.85	2.5	
Torrent 300	540	23	2.2	3.0	609

DIMENSIONS

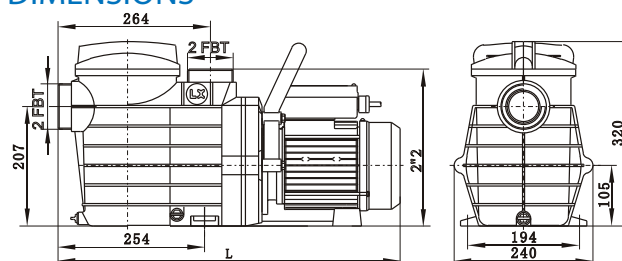


INSTALLATION

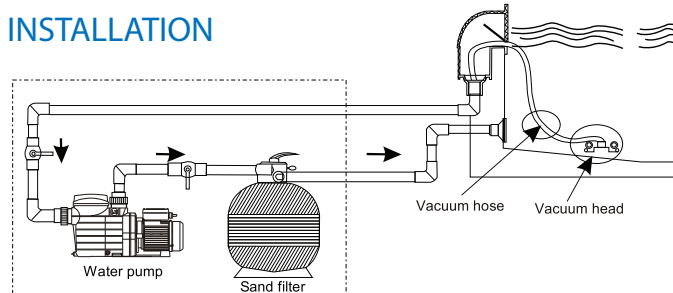

Commercial models available upon request
AUTHORISED DEALER:

PUMP PERFORMANCE CURVES

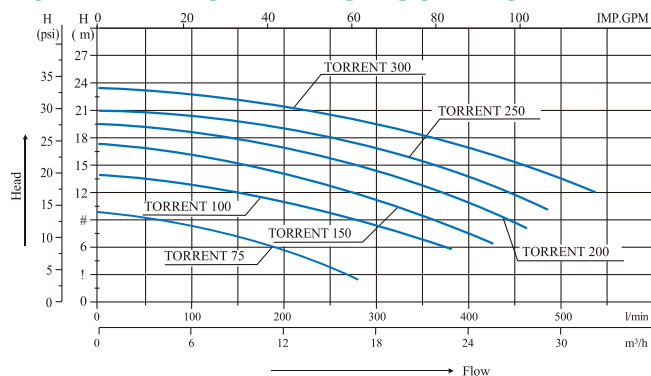

AquaTuff and Torrent are registered Trademarks of Profacture Pty Ltd